

## Overview: Mounting arrangements

Side-Side






Side-Bottom

Side-Top

Top-Bottom

All mounting arrangements also available with heating jacket (shown: "Side-Side")

Option:  
with drain flange  
instead of drain screw

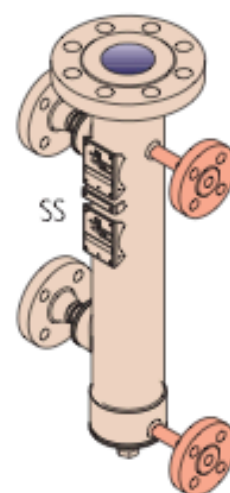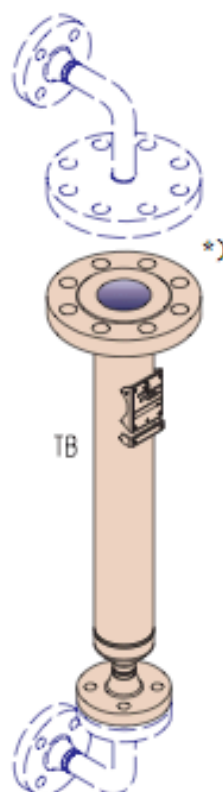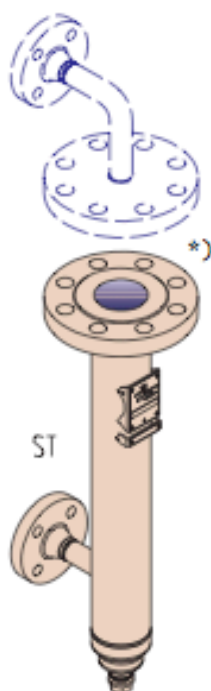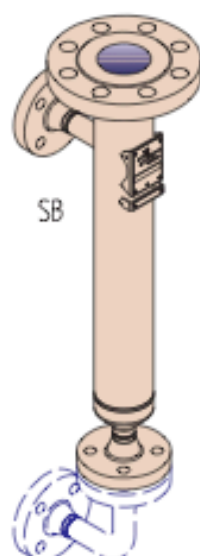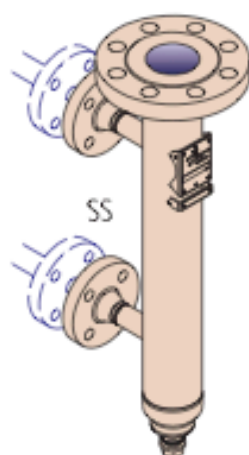

— to procure on site

\*) only possible with  
sandwich mounted devices:  
• 244LD • 144LD • 167LP




## Overview: Versions / Options

Standard

with flushing connector

partitioned  
(if > 3 m)

partitioned, and  
with flushing connector

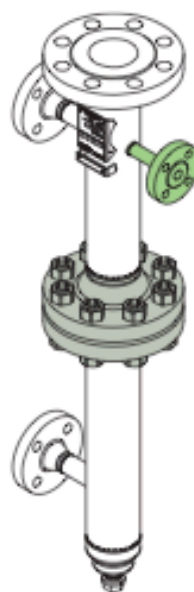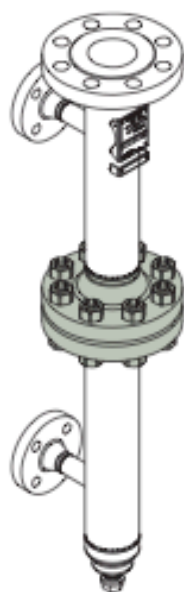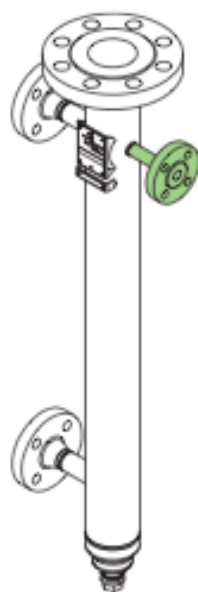

An additional blanking flange  
204BCF has to be ordered  
separately.  
(see page 25).

drain screw

drain valve

drain flange